

### Features:

- Modularised light source, with excellent heat dispersion.
- High light transmission rate
- Low lumen depreciation

▶ New technology

## LED Panel Lamp

RoHS  
No Mercury

Low heat

Low power

35,000 Hours



*2012 New products*

## LED Panel Lamp

Upgrade the Technology by Upgrading LED!

Super bright version giving up to 10,000 lumen, LUMAN panel lamp is the ideal solution to brighten up your space.


## SPECIFICATIONS

Power Consumption	35W
CRI	85
Materials	Aluminum and Polycarbonate
Operating Temp.	-20°C ~ 40°C
Size (W x L x H)	300x600x100mm / 295x595x100mm
Net Weight	3.3 kg
Input Voltage	100-220VAC 50/60Hz
Luminous	2250 lm / 2000 lm / 1800 lm
Life Time	35000 Hrs (10Hrs/Day)
Colour Temp.	Cool White (>5500K) / Day White (4000K) / Warm White (3000K)

Power Consumption	45W
CRI	85
Materials	Aluminum and Polycarbonate
Operating Temp.	-20°C ~ 40°C
Size (W x L x H)	600x600x100mm / 595x595x100mm
Net Weight	4.6 kg
Input Voltage	100-220VAC 50/60Hz
Luminous	3000 lm / 2700 lm / 2400 lm
Life Time	35000 Hrs (10Hrs/Day)
Colour Temp.	Cool White (>5500K) / Day White (4000K) / Warm White (3000K)

Power Consumption	55W
CRI	85
Materials	Aluminum and Polycarbonate
Operating Temp.	-20°C ~ 40°C
Size (W x L x H)	600x600x100mm / 595x595x100mm
Net Weight	4.6 kg
Input Voltage	100-220VAC 50/60Hz
Luminous	3750 lm / 3375 lm / 3000 lm
Life Time	35000 Hrs (10Hrs/Day)
Colour Temp.	Cool White (>5500K) / Day White (4000K) / Warm White (3000K)

Power Consumption	120W
CRI	85
Materials	Aluminum and Polycarbonate
Operating Temp.	-20°C ~ 40°C
Size (W x L x H)	600x600x100mm / 595x595x100mm
Net Weight	6.15 kg
Input Voltage	100-220VAC 50/60Hz
Luminous	10000 lm
Life Time	35000 Hrs (10Hrs/Day)
Colour Temp.	Cool White (>5500K)

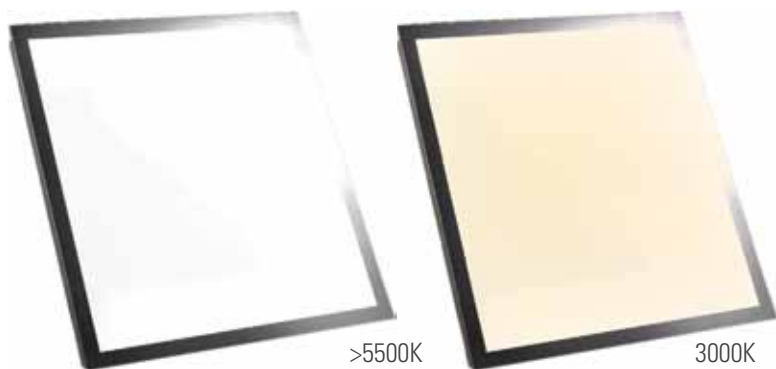

## APPLICATION

- Hotel
- Office
- Retail shop

3 different sizes:

